


Mennyezeti LED lámpatest 18W CCT biztonsági világítási funkcióval

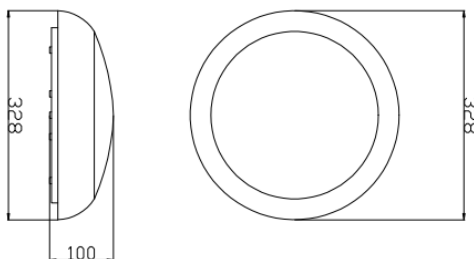

Feszültség: 220-240V

Teljesítmény: 18W

Akkumulátor típusa: Li-ion

Környezeti hőmérséklet: 0...+40°C

IP besorolás: IP54

Szerelés típusa: Felületre szerelt

Frekvencia: 50 / 60Hz

Időtartam: 3 óra, 2W

Akkumulátor feszültsége: 3.7V 2600MAH

Változó idő: 16 óra

Osztály: II

Színhőmérséklet fényerősség: meleg fehér 1745lm
hideg fehér 1800lm
nappali fény 1890lm


Ha a termék sérült vagy más módon nem megfelelő, NE telepítse a terméket.

TELEPÍTÉS



1. Válassza szét a búrát a lámpatesttől.
2. Vegye ki a LED panelt lámpatestből.
3. Vezesse át a hálózati tápkábelt a lámpatesten.
4. Helyezze el és rögzítse biztonságosan a lámpatestet, a mellékelt csavarokkal, gumi alátétekkel és tiplikkel
Csavarja vissza a lámpabúrát a lámpatestre az óramutató járásával megegyező irányba.
(csavarokat, gumi alátéteket és tipliket a csomag tartalmazza).

Rögzítő furatvezetők állnak rendelkezésre az alaplemezen, amelyet meg kell fűzni, hogy a csavar átmenjen a lámpatesten.

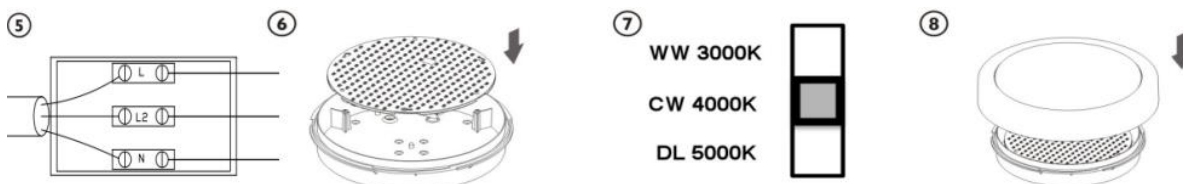



5. Rögzítse a kábeleket az ábra szerint.
6. Helyezze vissza a LED panelt a lámpatestbe.
7. Állítsa be a kívánt színhőmérsékletet.
8. Helyezze vissza a búrát a lámpatestre.

FIGYELEM!

Kapcsolja le a hálózati tápellátást, a bekötés előtt.

A SZERELÉST CSAK SZAKEMBER VÉGEZHETI!

Manual Instructions



Voltage:220-240V

Power:18W

Duration:3hrs,2w

Battery Type:Li-ion

Battery Voltage:3.7V 2600MAH

Frequency:50/60Hz

Ambient Temp.:0°C-40°C

Changing Time:16 Hours

IP Rating:IP54

Mounting Type:Surface Mounted

Lumen Output:Warm white 1745lm

Class:II


Cool White 1800lm

Day Light 1890lm

Remove the product from the box and inspect it for any damage.If you believe the product to be damaged or otherwise unsound,DO Not install the product.Please pack it back into its box and return it to the Place of purchase for replacement.If the product is satisfactory,proceed with the installation.


INSTALLATION

①




Separate diffuser from base Plate by twisting diffuser in an anti-clockwise direction.

②




Separate LED PCB from base plate by loosening retaining screws and twist PCB in a clockwise direction.

③



Feed the mains power cable through the grommet on the base plate in preparation for connection.

④




Position and securely fix base plate to mounting surface using secure fixing methods (screws, rubber washer and wall plugs supplied). Fixing hole guides are

provided

on the base plate to be drilled to suit.

⑤



Terminate the cables into the terminal block ensuring the correct polarity is observed. Ensure all conductors are fully sleeved and insulated.

⑥



Reattach the PCB to the base plate by positioning holes over screws, twisting the PCB in an anti-clockwise direction until secure then tighten retaining screws.

⑦

WW 3000K
CW 4000K
DL 5000K



Set desired colour temperature.

⑧



Reattach diffuser to base plate by twisting diffuser in a clockwise direction until secure. Your fitting is now ready to use.

SAFETY WARNINGS

1. **THIS PRODUCT MUST ONLY BE INSTALLED BY A LICENSED ELECTRICIAN.**
2. **BEFORE COMMENCING INSTALLATION TURN OFF AND ISOLATE THE ELECTRICAL SUPPLY.**
3. **RISK OF ACCIDENTAL CONTACT WITH LIVE PARTS. DO NOT ENERGISE WITH PRODUCT OPEN OR DISSASSEMBLED.**
4. **SUPPLY VOLTAGES WITHIN PRODUCT. ISOLATE SUPPLY VOLTAGES BEFORE OPENING OR SERVICING.**
5. **THIS LUMINAIRE IS NOT INTENDED FOR USE IN HIGH-RISK TASK AREA LIGHTING.**
6. **MAINS SUPPLY AND BATTERY CIRCUIT SEPARATED BY REINFORCED INSULATION.**
7. **THE ONLY USER SERVICEABLE / REPLACEABLE PART IS THE BATTERY PACK.**
8. **DO NOT ATTEMPT TO SERVICE OTHER PARTS OF THE FITTING AS THIS WILL VOID THE WARRANTY.**
9. **AS THE INSTALLER, IT IS YOUR RESPONSIBILITY TO ENSURE YOU COMPLY TO ALL RELEVANT BUILDING AND SAFETY CODES FOR EXAMPLE THE BCA, AS3000. REFER TO APPLICATION STANDARDS FOR THE RELEVANT RULES.**